



**EMAS ELEKTROTEKNİK MAKİNA
SANAYİ VE TİCARET A.Ş**


Ziya Gökalp Mah. İkitelli Organize Sanayi Bölgesi
Atatürk Bulvarı No:50 34490 Başakşehir / İstanbul /
TÜRKİYE

Telefon : +90 212 549 22 52

Faks : +90 212 549 25 80

Web : www.emasas.com.tr

Technical Specifications : PDKA22BG330

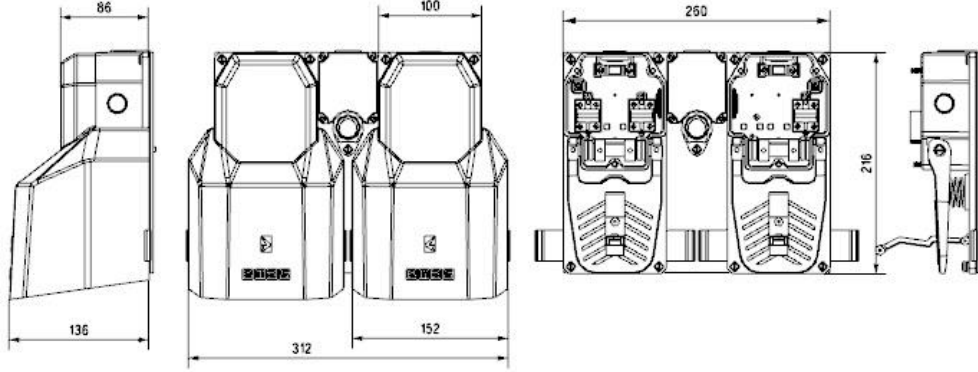

Technical Information

Body:

Aluminium body
Double Foot Switches
Single level and two levels
Suitable Accessory
Maximum strength to mechanical pulses
Ergonomic usage facility with 2 different sizes
Contact Block: K 13
(1NO+1NC)+1(1NO+1NC)+2NC)

Standards:



Contact Block: TS EN 60947-5-1
(PDA-PD)



General Specifications

Operating Temperature	min. / max. °C -25 / +80
Mechanical Life (Operating Frequency)	1.000.000 operations min. Without load 3000 operations / hour)
Electrical Life (Operating Frequency)	100.000 operations min. At full load 1200 operations / hour)
K13 Block Tightening Torque	0.6-0.8N m
K13 Block Connection Wire	Min: 1x0.5mm ²
Wire Profile	Max: 2x2.5mm ²
Protection Degree	IP 65

Electrical Information

General Specifications

Range Of Use		AC 15
Rated Operating Voltage	Ue	250V AC
Fregquency	f	50Hz
Rated Operating Current	Ie	4A
Insulation Voltage	Ui	300V