



**EMAS ELEKTROTEKNİK MAKİNA
SANAYİ VE TİCARET A.Ş**

İkitelli Organize Sanayi Bölgesi


Atatürk Bulvarı No:50 34490 Başakşehir / İstanbul /
TÜRKİYE

Telefon : +90 212 549 22 52

Faks : +90 212 549 25 80

Web : www.emasas.com.tr

Technical Specifications :
PDKS11GX20G Ziya Gökalp Mah.

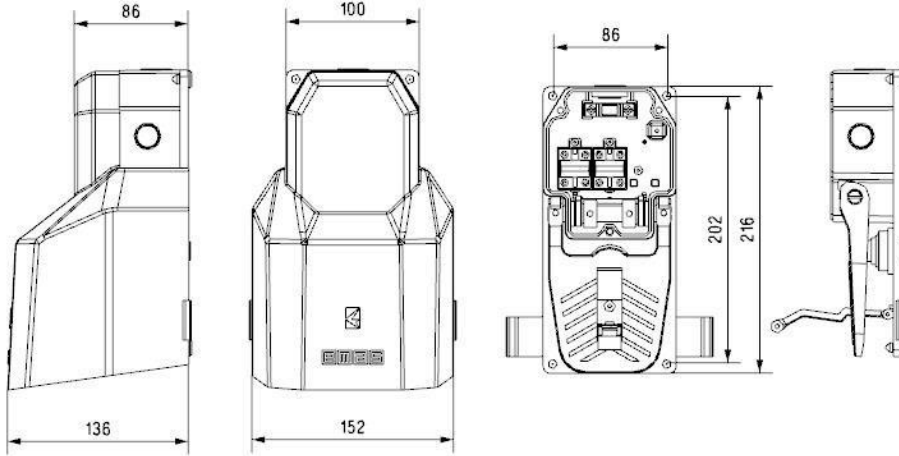

Operating Temperature	min. / max. °C -25 / +80
Mechanical Life (Operating Frequency)	1.000.000 operations min. Without load 3000 operations / hour)
Electrical Life (Operating Frequency)	100.000 operations min. At full load 1200 operations / hour)
K13 Block Tightening Torque	0.6-0.8N m
K13 Block Connection Wire	Min:1x0.5mm ²
Wire Profile	Max:2x2.5mm ²
Protection Degree	IP 65

Technical Information

General Specifications

Body:

Aluminium body

Two levels

Maximum strength to mechanical pulses

Ergonomic usage facility with 2 different sizes

Standard (Accessory Assembly Unsuitable)

Contact Block: K 13 2(1NA+1NK)

Standards:



Contact Block: TS EN 60947-5-1
(PDA-PD)



Electrical Information

General Specifications

Range Of Use		AC 15
Rated Operating Voltage	Ue	250V AC
Freguency	f	50Hz
Rated Operating Current	Ie	4A
Insulation Voltage	Ui	300V